


# KSST-01 STAR TRACKER

## DATASHEET

KSST-01 is a compact size, fully autonomous star tracker, ideal for CubeSat and NanoSat missions. It is designed with minimized dimensions, mass and power consumption while maintaining high accuracy.

### SPACE PROVEN

- Internal accelerometer
- Compact size
- Ability to take images on-the-fly
- Dark current calibration
- Unique internal cooling system to increase sensor accuracy

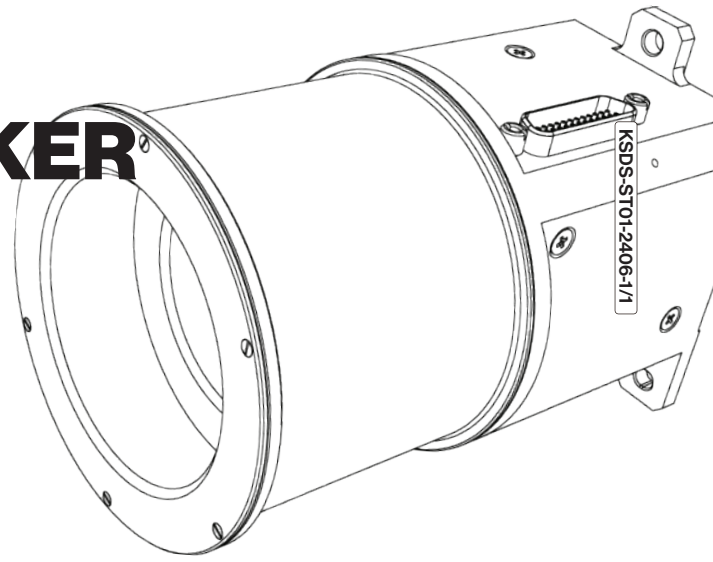

### Performance

Accuracy	Pointing <math>< 5 \text{ arcsec}</math> @ $3\sigma$ Rolling <math>< 60 \text{ arcsec}</math> @ $3\sigma$ Thermo-elastic error <math>< 0.1 \text{ arcsec}/^\circ\text{C}</math> FOV spatial error <math>< 0.78 \text{ arcsec}</math> @ $3\sigma$ Pixel spatial error <math>< 2.5 \text{ arcsec}</math> @ $3\sigma$ Temporal NEA <math>< 0.8 \text{ arcsec}/\text{vHz}</math> @ $3\sigma$
Acquisition time	<math>< 2 \text{ seconds}</math>, at $5^\circ / \text{sec}</math> up to 10 mins$
Update rate	10 Hz
Maximum slew rate	$5^\circ / \text{sec}</math>$
The angular width of the FOV	$22^\circ (\pm 11 \text{ arc degree})</math>$
Sun exclusion angle	$30^\circ$
Earth limb exclusion angle	$25^\circ$
Volume of stellar catalogue	1800 stars up to 5.5m. Total number of stars in catalogue is about 5000

### Mechanical

Dimensions with baffle	56 x 60 x 92.8 mm
Weight	175 g (without cable, MLI and protective covers)

### Electrical


Power consumption	regular mode 0.3 W / thermoelectric cooler on / calibration mode 0.8 W
Operational voltage	5V (optional 12V or 3.3V)
Connector type	Micro D-sub DB-25
Data interface	RS-485 (optional UART, CAN)

### Optic system

Aperture	18.6 mm
Focal length	20.44 mm
CMOS geometry	1024 x 1280 pixels
Pixel size	$5.3 \mu\text{m} \times 5.3 \mu\text{m}$
Working range of wevelengths	400 - 900 nm

### Environment

Operating temperature	$-30^\circ\text{C} - +65^\circ\text{C}$
Storage temperature	$-40^\circ\text{C} - +85^\circ\text{C}$
Mechanical loads	Random 30 gRMS, Shocks 2350 gSRS in all directions
Life time	up to 7 years on LEO

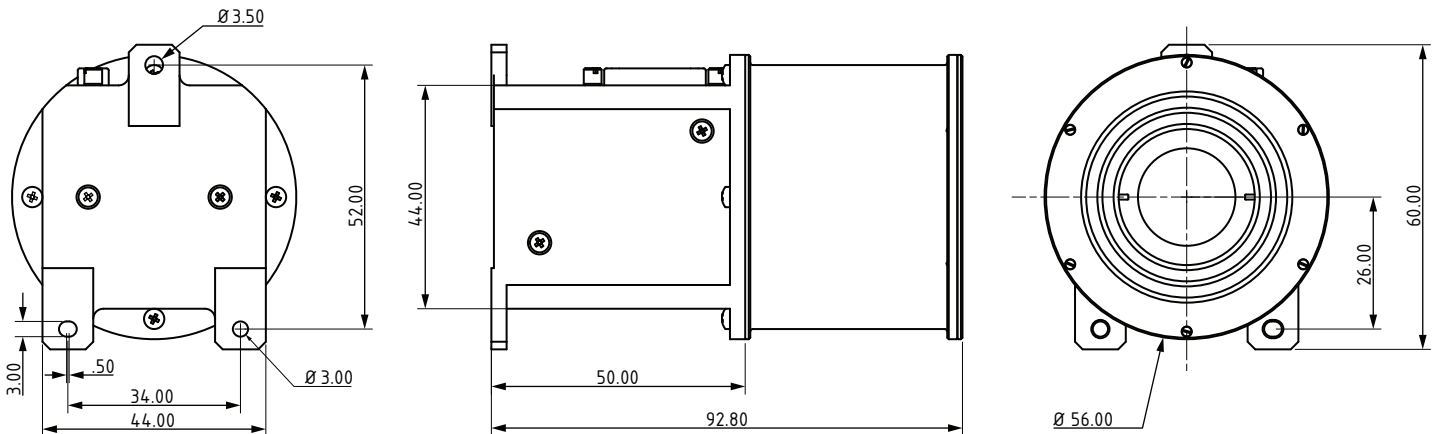

\*Units: Metric mm